

REVISION	DATE
7-13-01	

*.DGN FILE NAME
PM-9

METRIC  
STANDARD PLANS

STATE OF NEW HAMPSHIRE  
DEPARTMENT OF TRANSPORTATION, CONCORD, N.H.

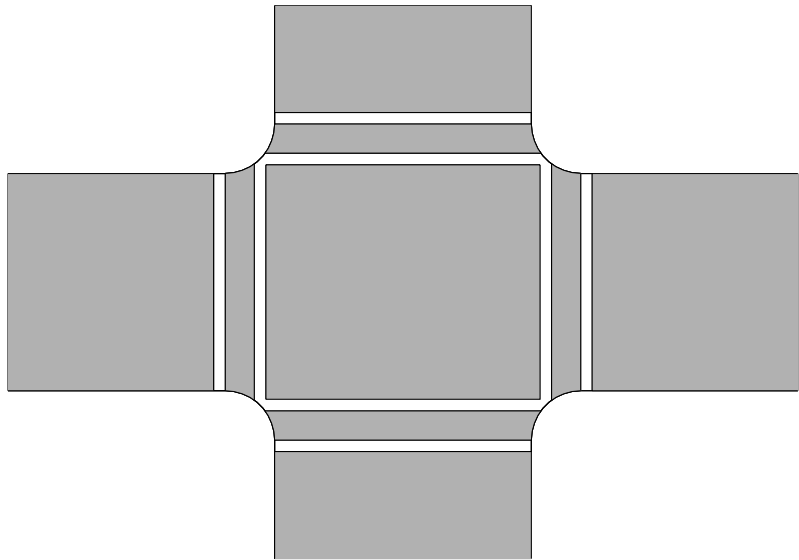


FIGURE A - STANDARD CROSSWALK MARKING

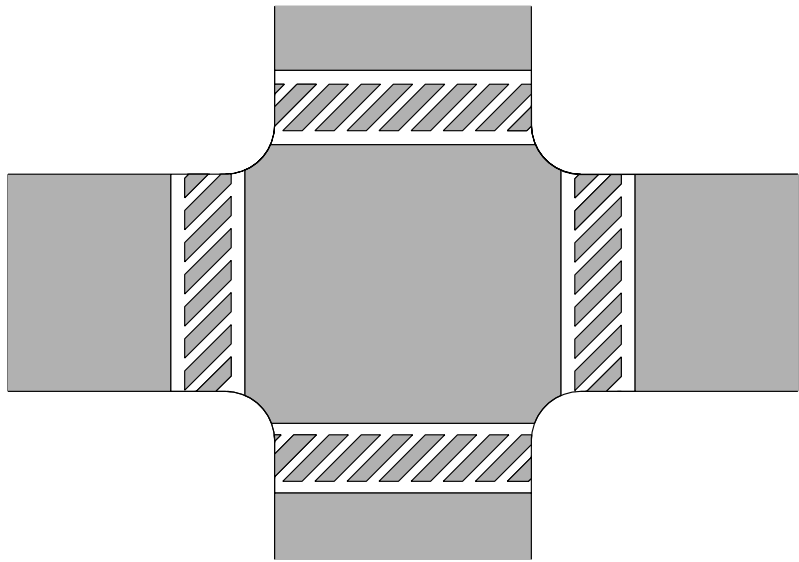


FIGURE B - CROSSWALK MARKING WITH DIAGONAL LINES

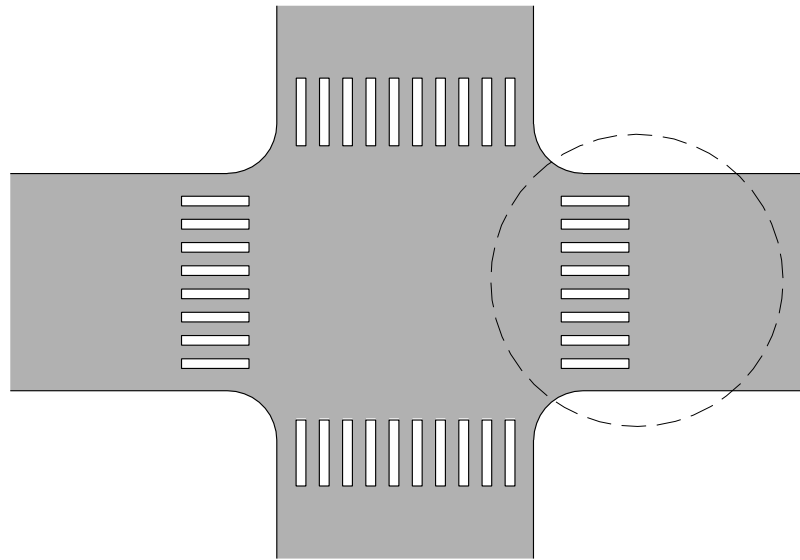


FIGURE C - CROSSWALK MARKING WITH LONGITUDINAL LINES

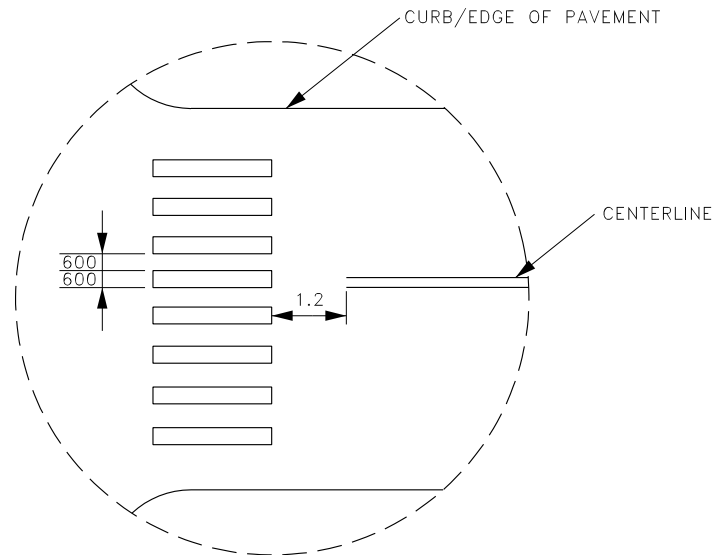


FIGURE C - CROSSWALK DETAIL

GENERAL NOTES

1. TRANSVERSE CROSSWALK LINES SHALL BE SOLID WHITE LINES NOT LESS THAN 150 mm WIDE AND NOT LESS THAN 2.0 m APART C-C.
2. FOR ADDED VISIBILITY CROSSWALKS MAY BE MARKED WITH DIAGONAL LINES AT 45 DEGREES, (FIGURE B). DIAGONAL LINES SHOULD BE APPROXIMATELY 600 mm WIDE AND SPACED 600 mm APART.
3. WHITE LONGITUDINAL LINES AT 90 DEGREES 600 mm WIDE AND 600 mm APART MAY BE USED WITH THE TRANSVERSE LINES OMITTED, (FIGURE C).

PAVEMENT MARKING STANDARD

CROSSWALK DETAIL OPTIONS

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS OR METERS. WHOLE NUMBERS INDICATE MILLIMETERS; DECIMAL NUMBERS INDICATE METERS UNLESS OTHERWISE NOTED.

REVISION	DATE
7-13-01	

*.DGN FILE NAME
PM-9

METRIC  
STANDARD PLANS

STATE OF NEW HAMPSHIRE  
DEPARTMENT OF TRANSPORTATION, CONCORD, N.H.

